


Chemical Supply System



Size (L/W/H)	2000/1000/2350 mm (6.6/3.3/7.7 ft)
Trolley height	400 mm (1.3 ft)
Weight	0.6t + 2x Drums

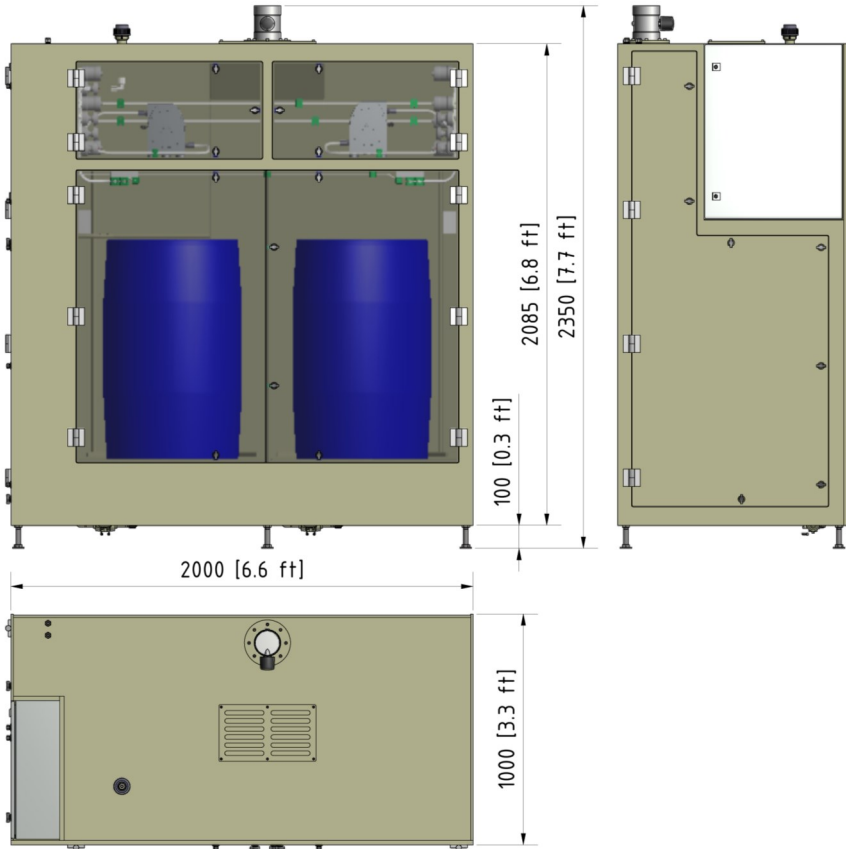

Specifications and key features

- Fully automated supply system for high-purity chemicals
- User-optimized
- Dual or single drum/IBC cabinet with roller conveyor
- Independent control system
- Flexible by modular construction (options)
- SLSi + S2LSi
- High Purity compatible

Material

- Housing: PP/PVC
- Wetted parts: PFA/Teflon/PP-N

Reliability

- Uptime > 99.98%
- Flow rate: up to 35 L/min (9.25 gpm)
- Low maintenance

Control system

- PLC

Chemical Supply System

Standard Configuration

- Dual Drum/Single IBC
- Single Pump
- No Filter
- Gravity Drain

Options

- Dual IBC
- Filter
- Drain Pump
- Loop system

Other data

- Drum/IBC - 2 x 200 L/1 x 1000 L (other sizes available on request)
- Electrical Power - 110V-230VAC @ 50/60 Hz

Utility Requirements

Utilities	Connection	Maximum Flow Rate
Compressed air	½" SS	18 m³/h (4,755 gph)
Nitrogen	½" SS	
Drain	DN 25	20 L/min (5.28 gpm)
Chemical	½" PFA	35 L/min (9.25 gpm)

THIS DOCUMENT CONTAINS INFORMATION THAT IS SUBJECT TO CHANGE WITHOUT NOTICE.

No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including but not limited to photocopying, recording, information retrieval systems, or computer network without the written permission of HighQ-Factory GmbH.

All other products and services mentioned may be trademarks or service marks of their respective owners.

©2010-2014 by HighQ-Factory GmbH. All rights reserved.